


GR...B

GIUNTI ROTANTI PER ACQUA, ARIA, OLIO, VUOTO
 ROTATING JOINTS FOR WATER, AIR, OIL, VACUUM
 DREHDURCHFÜHRUNGEN FÜR WASSER, LUFT, ÖL, VAKUUM
 RACCORDE TOURNANTS POUR EAU, AIR, HUILE, VIDE
 JUNTAS ROTATIVAS PARA AGUA, AIRE, ACEITE, VACIO

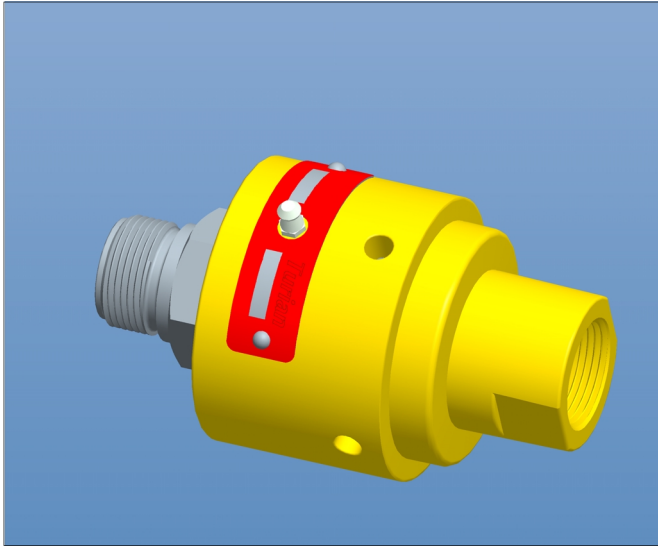

t_{max} 170 °C **p_{max}** 40 bar


GR 10 B - GR 15 B
n_{max} 3500 RPM
GR 20 B - GR 25 B
n_{max} 3000 RPM
GR 32 B - GR 40 B
n_{max} 2500 RPM
GR 50 B
n_{max} 1000 RPM

Torque Ratings Nm Water 4.2 bar	
GR 10 B	0.28
GR 15 B	0.32
GR 20 B	0.62
GR 25 B	1.3
GR 32 B	1.6
GR 40 B	2.2
GR 50 B	3.2

Evitare l'impiego alla massima velocità con la massima pressione.
 Avoid working at maximum speed with maximum pressure.
 Max.Drehzahl gleichzeitig mit max. Druck ist zu vermeiden.
 Evitez l'emploi de la pression maximum à la vitesse maximum.
 Evitar el trabajo a máxima velocidad combinada con máxima presión.

GIUNTI ROTANTI AD UNA VIA
 ONE WAY ROTATING JOINTS

EINWEG DREHDURCHFÜHRUNGEN
 RACCORDE TOURNANTS SIMPLE PASSAGE
 JUNTA ROTATIVA SIMPLE PASO

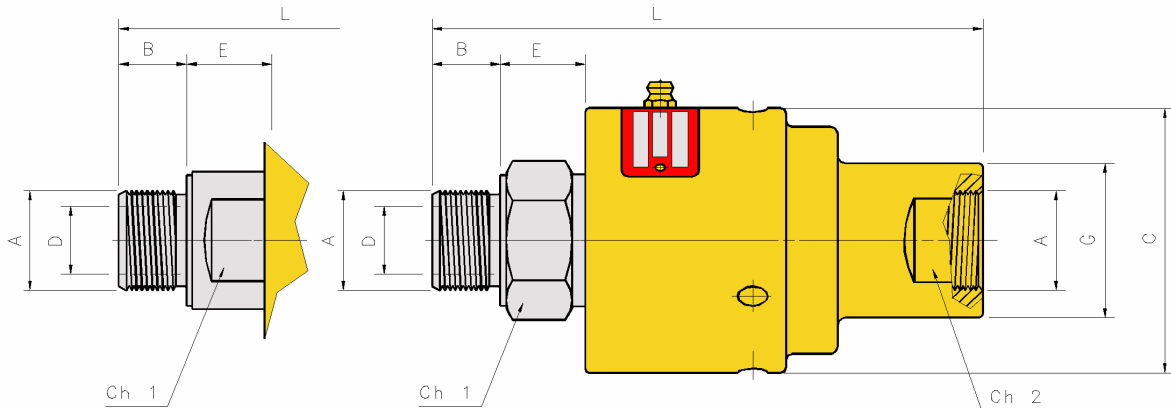

GR 32÷50

GR 10÷25

Corpo Gehäuse Housing Boîtier Cuerpo	Ottone Messing Brass Laiton Latón	Corpo Gehäuse Housing Boîtier Cuerpo	Alluminio Aluminium	A BSP	B	C	D	E	G	L	Ch 1	Ch 2	PESO- WEIGHT Kg
GR 10 B		GR 10 B-A		3/8	12	47	9	13	30	90	24	24	0.58
GR 15 B		GR 15 B-A		1/2	15	60	13	18	35	120	32	32	1.3
GR 20 B		GR 20 B-A		3/4	15	70	18	21	42	138	36	36	1.7
GR 25 B		GR 25 B-A		1"	20	84	24	21.5	47	148	41	41	2.3
GR 32 B		GR 32 B-A		1"1/4	25	90	32	26	60	165	50	55	3.4
GR 40 B		GR 40 B-A		1"1/2	30	108	38	26	75	181	55	70	4.8
GR 50 B		GR 50 B-A		2"	35	127	48	32	80	207	65	75	8.0

TURIAN

Via Jucker,19
 I-21053 CASTELLANZA (Va)

tel. ++39 0331 501101
 fax ++39 0331 505189